



CS-iWPT302-P无线蓝牙压力传感器

CS-iWPT302-P Wireless Bluetooth Pressure Sensor

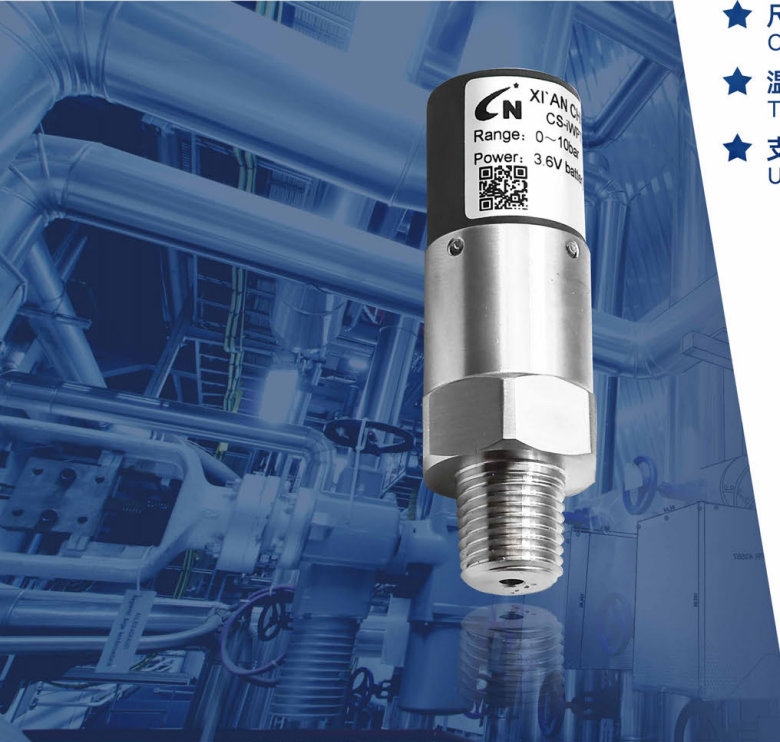


- ★ 尺寸小巧、方便安装
Compact size, easy to use
- ★ 温压一体监测
Temperature & pressure integrated
- ★ 支持上下限报警阈值设置
Upper and lower alarm points setup
- ★ 磁钢激活
Magnet activation
- ★ 定时采样
Regular sampling & broadcasting
- ★ 配套小程序查看数据
View data on APP

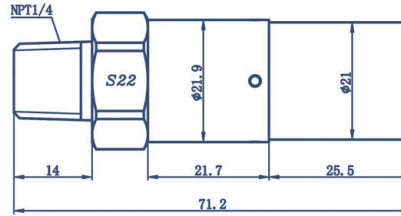

通用型, 接液材质316L, 全焊接结构, 2/5/10/20/50bar, 兼容所有介质, 适用范围广


General purpose, 316L, all welded construction, 2/5/10/20/50 bar, compatible with all media, wide range of applications

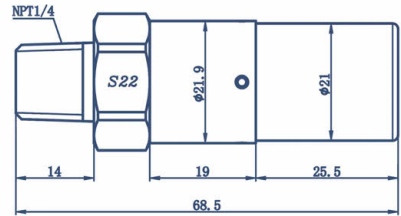

经济型, 尺寸紧凑, 10/20/50bar, 适用于水、空气、大多数冷媒介质

Economical, compact size, 10/20/50 bar, for water, air, most refrigerant media

手机小程序
APP

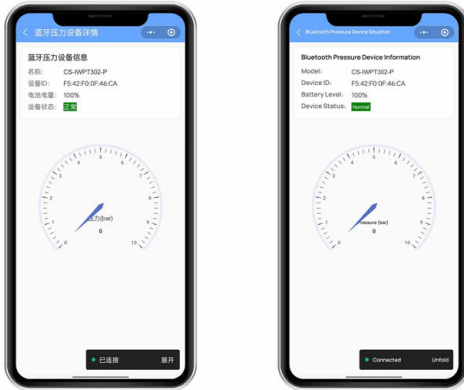

应用领域

适用于测量泵、压缩机、液压机、机械、挖掘机、气动设备的压力

Application

For pressure measurement for pumps, compressors, hydraulic machinery, excavators, pneumatic equipment

传输方式
Communication Mode

Bluetooth 5.1

供电方式
Power Supply

3.6VDC Lithium Battery

电池寿命
Battery Life

> 6 Years

压力量程
Pressure Range

2/5/10/20/50bar

压力精度
Pressure Accuracy

±1%F.S. (±0.5%F.S. Optional)

温度量程
Temperature Range

-40°C ~ 85°C

温度精度
Temperature Accuracy

±1°C

采样间隔
Sampling Interval

1~180s

广播间隔
Broadcast Interval

1~10s

介质温度
Medium Temperature

-40°C~105°C

防护等级
Ingress Protection

IP40

西安中星测控有限公司
Xi'an Chinastar M&C Ltd

400 029 2168

西安市高新区上林苑四路1309号A座6层
F6, Building A, No.1309 Shanglinyuan 4 Road, xi'an, China

+86-29-88325620


+86-29-88237768

sales@websensor.com

710119



公司官网
Official Website



微信公众号
WeChat Official Account


CS-iWPT302-T无线蓝牙温度传感器

CS-iWPT302-T Wireless Bluetooth Temperature Sensor



- ★ **测温元件：铂电阻**
Temperature measuring element: platinum
- ★ **尺寸小巧、方便安装**
Compact size, easy to use
- ★ **磁钢激活**
Magnet activation
- ★ **支持上下限报警阈值设置**
Upper and lower alarm points setup
- ★ **定时采样**
Regular sampling & broadcasting
- ★ **配套小程序查看数据**
View data on APP

手机小程序
APP

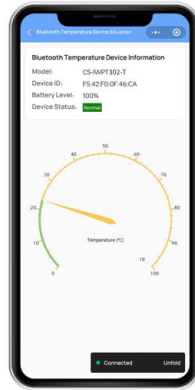

应用领域

适用于工厂罐体温度监控、温度巡查

Application

For temperature monitoring and temperature inspection of plant tanks

传输方式
Communication Mode

Bluetooth 5.1

供电方式
Power Supply

3.3~3.6VDC Lithium Battery

电池寿命
Battery Life

> 6 Years

温度量程
Temperature Range

-40°C ~ 125°C

温度精度
Temperature Accuracy

±1°C、±2°C

采样间隔
Sampling Interval

1~180s

广播间隔
Broadcast Interval

1~10s

浸入管直径
Immersion Tube Diameter

Φ6mm

防护等级
Ingress Protection

IP40

西安中星测控有限公司
Xi'an Chinastar M&C Ltd

400 029 2168


西安市高新区上林苑四路1309号A座6层
F6, Building A, No.1309 Shanglinyuan 4 Road, xi'an, China

+86-29-88325620


+86-29-88237768

sales@websensor.com

710119



公司官网
Official Website



微信公众号
WeChat Official Account