

资料更改恕不另行通知
Subject to change without notice

CS-PT300M 冷冻机组压力系列

CS-PT300M Refrigeration Unit Pressure Transmitter

Hot SALE!




- ★ 高过载、高爆破
High Overload & Burst Pressure
- ★ 全焊接结构，无O型圈，无泄漏风险
All Welded Construction, No O-rings, No Leakage Risk

- ★ 防冷凝水
Anti-condensation Water
- ★ 正反向过电压
Forward and Reverse Overvoltage
- ★ 宽温区
Wide Temperature Range
- ★ 优异的抗电磁干扰性能
Excellent Electromagnetic Immune Ability



PRESSURE TRANSMITTER

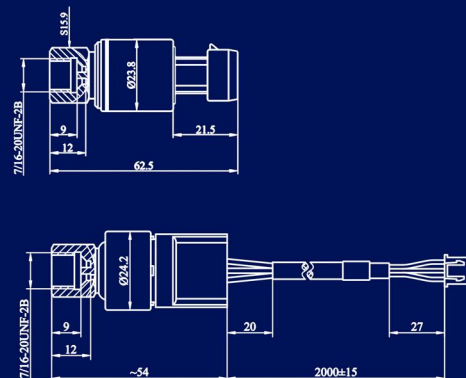

压力范围
Pressure Range -1...10~50bar
-14.5~145...725psi

过载压力
Overload Pressure 300%F.S.
(≤105bar or 1520psi)

爆破压力
Burst Pressure 500%F.S.
(≤175bar or 2535psi)

精度
Accuracy 1%F.S.

供电电源
Power Supply 5±0.25VDC

输出信号
Output Signal 0.5~4.5V Ratio Voltage

介质温度
Medium Temperature -40°C~125°C
-40°F~257°F

应用领域 Application Area

Industrial Chiller Units

Multi-split Air Conditioner

Air Source Heat Pump

Interrow Refrigeration
Air Conditioning

Data Center Cooling Unit

工业冷冻机组

多联机

空气源热泵

列间空调

精密机房空调

西安中星测控有限公司
Xi'an Chinastar M&C Ltd

400 029 2168

西安市高新区上林苑四路1309号A座6层
F6, Building A, No.1309 Shanglinyuan 4 Road, xi'an, China

+86-29-88325620

+86-29-88237768

sales@websensor.com

710119



公司官网
Official Website



微信公众号
WeChat Official Account